


# APF 15/40

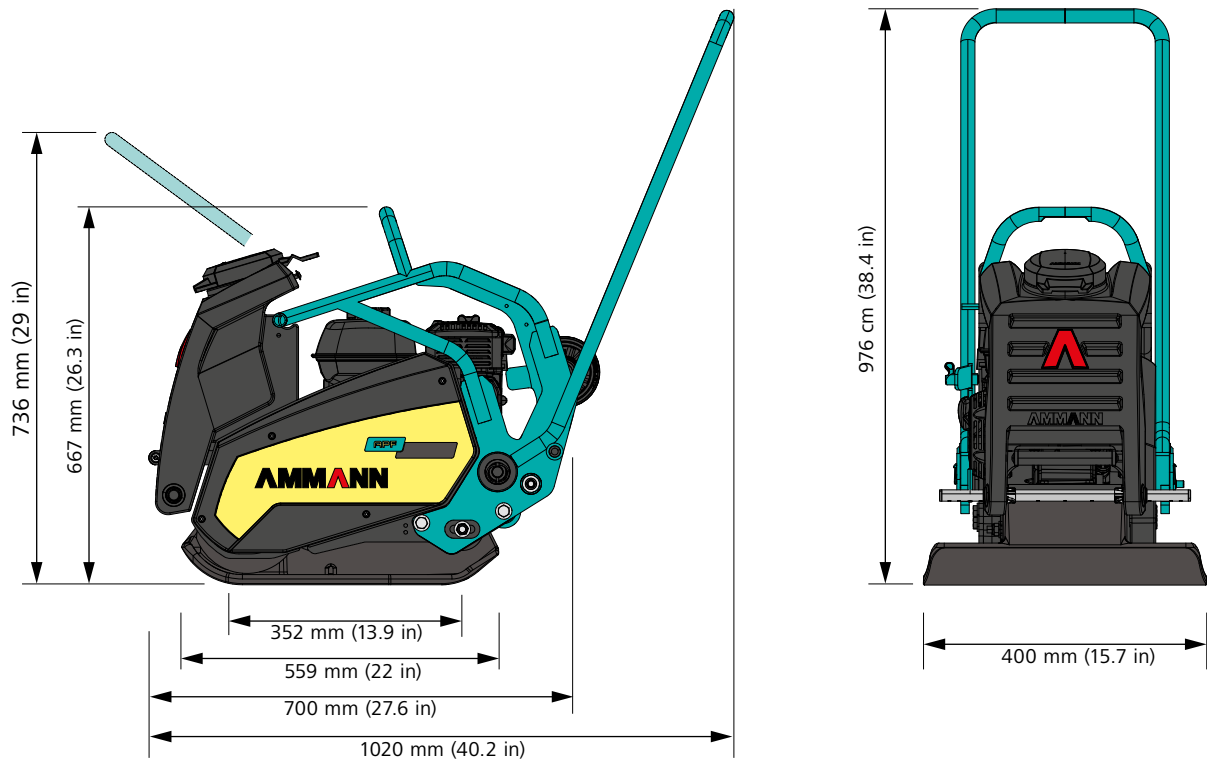

## WEIGHTS & DIMENSIONS

MACHINE WEIGHT	<sup>(1)</sup> 80 kg (176 lb)   <sup>(2)</sup> 84 kg (185 lb)
MACHINE WEIGHT (INCL. OPTIONAL SPRINKLER & WHEELS)	<sup>(1)</sup> 89 kg (196 lb)   <sup>(2)</sup> 93 kg (205 lb)
A MACHINE LENGTH	700 mm (27.6 in)
B MACHINE LENGTH WITH HANDLE	1020 mm (40.2 in)
C BASE PLATE LENGTH	559 mm (22 in)
D GROUND CONTACT LENGTH	352 mm (13.9 in)
E MACHINE HEIGHT	667 mm (26.3 in)
F WITH HANDLE (WORK)	976 mm (38.4 in)
G WITH HANDLE (TRANSPORT)	690 mm (27.2 in)
H MACHINE WIDTH	400 mm (15.7 in)

## ENGINE

ENGINE	<sup>(1)</sup> Honda GX 160	<sup>(2)</sup> Vanguard 160	<sup>(3)</sup> Rato R180
FUEL	Petrol	Petrol	Petrol
ENGINE OUTPUT AT RPM	3.6 kW (4.8 HP) 3600	3.7 kW (5 HP) 3600	3.8 kW (5.1 HP) 3600

## COMPACTION FORCES

MAX. VIBRATION FREQUENCY	100 Hz (6000 rpm)
MAX. CENTRIFUGAL FORCE	15 kN (3372 lbf)
WORKING SURFACE	648 m <sup>2</sup> /h (6975 ft <sup>2</sup> /h)
SPEC. SURFACE PRESSURE	10.7 N/cm <sup>2</sup> (15.5 psi)

## MISCELLANEOUS

HAND-ARM VIBRATIONS	< 2.5 m/sec <sup>2</sup>
SPEED	0–27 m/min (0–88.6 ft/min)
GRADEABILITY	30%
MAX. INCLINE TO ALL SIDES	20°

APF 15/40

For additional product information and services please visit: [www.ammann.com](http://www.ammann.com)  
Materials and specification data are subject to change without notice.  
MSS-1570-06-EN | © Ammann Group

**AMMANN**